

Carbon Coupling with Stop

P x P



Job Name

Job Location

P.O.#

Engineer

Contractor

Wholesaler

Merit Associate

MeritPress™ - Carbon Coupling with Stop P x P is available in sizes ½" – 2" with an EPDM, HNBR and FKM sealing element.

- **FIRST TO MARKET Visual Indicator Press Ring (VIPR)™:** facilitates immediate identification of un-pressed connections.
- **Leak Before Press (LBP):** in addition to the Visual Indicator Press Ring (VIPR)™, all sizes have leak before press technology, which guarantees a visual indication if the fitting is not pressed.
- **Surface Protection:** Corrosion Resistant Zn-Ni Plating.
- **Grab Ring:** Deforms and Grips Outside Diameter of Pipe.
- **Applications:** Hydronic Heating, the Conveyance of Fluids, Gases, Oils, and Low-Pressure Steam.

MeritPress™ - Carbon Press Operational Parameters

Working pressure range from full vacuum to 250 psi (17.2 bar) for water, 125 psi (8.6 bar) for gas, and 200 psi (13.7 bar) for industrial applications.

MeritPress™ - Carbon Press Certifications

IAPMO Z 1117 (EPDM and FKM), IAPMO/ANSI LC 4/CSA 6.32 (HNBR), and UL 213 and FM 1920 (EPDM & FKM).


MeritPress™ - Carbon Press Codes and Standards

IAPMO Z 1117, IAPMO/ANSI LC 4/CSA 6.32, ASME B31.1, B31.3, B31.9, CSA B149.1, UPC, and UMC.

Carbon Coupling with Stop

P x P

Item Number			Nominal Size 1	A (in)	L (in)
EPDM	HNBR	FKM			
MB90000	MB90001	MB90002	½"	0.79	2.83
MB90005	MB90006	MB90007	¾"	0.87	3.23
MB90010	MB90011	MB90012	1"	0.87	3.58
MB90015	MB90016	MB90017	1¼"	1.13	4.72
MB90020	MB90021	MB90022	1½"	1.18	4.88
MB90025	MB90026	MB90027	2"	1.26	5.12

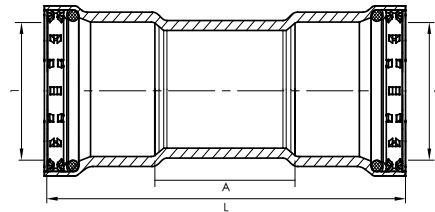

Carbon XL Coupling with Stop

P x P



Job Name	<input type="text"/>
Job Location	<input type="text"/>
P.O.#	<input type="text"/>
Engineer	<input type="text"/>
Contractor	<input type="text"/>
Wholesaler	<input type="text"/>
Merit Associate	<input type="text"/>

MeritPress™ - Carbon XL Coupling with Stop P x P is available in sizes 2½" – 4" with an EPDM, HNBR and FKM sealing element.

- **FIRST TO MARKET Visual Indicator Press Ring (VIPR)™:** facilitates immediate identification of un-pressed connections.
- **Leak Before Press (LBP):** in addition to the Visual Indicator Press Ring (VIPR)™, all sizes have leak before press technology, which guarantees a visual indication if the fitting is not pressed.
- **Surface Protection:** Corrosion Resistant Zn-Ni Plating.
- **Grab Ring:** Deforms and Grips Outside Diameter of Pipe.
- **Applications:** Hydronic Heating, the Conveyance of Fluids, Gases, Oils, and Low-Pressure Steam.

MeritPress™ - Carbon Press Operational Parameters

Working pressure range from full vacuum to 250 psi (17.2 bar) for water, 125 psi (8.6 bar) for gas, and 200 psi (13.7 bar) for industrial applications.

MeritPress™ - Carbon Press Certifications

IAPMO Z 1117 (EPDM and FKM), IAPMO/ANSI LC 4/CSA 6.32 (HNBR), and UL 213 and FM 1920 (EPDM & FKM).

MeritPress™ - Carbon Press Codes and Standards

IAPMO Z 1117, IAPMO/ANSI LC 4/CSA 6.32, ASME B31.1, B31.3, B31.9, CSA B149.1, UPC, and UMC.

Carbon XL Coupling with Stop			P x P		
Item Number			Nominal Size 1	A (in)	L (in)
EPDM	HNBR	FKM			
MB90030	MB90031	MB90032	2½"	1.18	4.92
MB90035	MB90036	MB90037	3"	1.42	5.98
MB90040	MB90041	MB90042	4"	1.63	7.87

