

Coupling with Stop

P x P



Job Name

Job Location

P.O.#

Engineer

Contractor

Wholesaler

Merit Associate

- CarbonPress® Coupling with Stop P x P** is available in sizes ½" – 2" with an EPDM, HNBR and FKM sealing element.
- **FIRST TO MARKET Visual Indicator Press Ring® (VIPR®):** facilitates immediate identification of un-pressed connections.
 - **Leak Before Press (LBP):** in addition to the VIPR®, all sizes have leak before press technology, which guarantees a visual indication if the fitting is not pressed.
 - **Surface Protection:** Corrosion Resistant Zn-Ni Plating.
 - **Grab Ring:** Deforms and Grips Outside Diameter of Pipe.
 - **Applications:** Hydronic Heating, the Conveyance of Fluids, Gases, Oils, and Low-Pressure Steam.

CarbonPress® Operational Parameters:

Working pressure range from full vacuum to 250 psi (17.2 bar) for water, 125 psi (8.6 bar) for gas, and 200 psi (13.7 bar) for industrial applications.

CarbonPress® Certifications

IAPMO Z 1117 (EPDM and FKM). IAPMO/ANSI LC 4/CSA 6.32 (HNBR).


CarbonPress® Codes and Standards

IAPMO Z 1117, IAPMO/ANSI LC 4/CSA 6.32, ASME B31.1, B31.3, B31.9, CSA B149.1, UPC, and UMC.

Coupling with Stop

P x P

| Item Number | | | Nominal Size 1 | A (in) | L (in) |
|-------------|---------|---------|-------------------|-----------|-----------|
| EPDM | HNBR | FKM | | | |
| MB90000 | MB90001 | MB90002 | ½" | 0.79 | 2.83 |
| MB90005 | MB90006 | MB90007 | ¾" | 0.87 | 3.23 |
| MB90010 | MB90011 | MB90012 | 1" | 0.87 | 3.58 |
| MB90015 | MB90016 | MB90017 | 1¼" | 1.13 | 4.72 |
| MB90020 | MB90021 | MB90022 | 1½" | 1.18 | 4.88 |
| MB90025 | MB90026 | MB90027 | 2" | 1.26 | 5.12 |

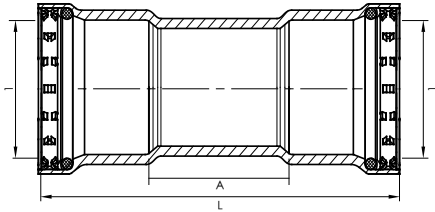

XL Coupling with Stop

P x P



Job Name

Job Location

P.O.#

Engineer

Contractor

Wholesaler

Merit Associate

CarbonPress® XL Coupling with Stop P x P is available in sizes 2½" – 4" with an EPDM, HNBR and FKM sealing element.

- **FIRST TO MARKET Visual Indicator Press Ring® (VIPR®):** facilitates immediate identification of un-pressed connections.
- **Leak Before Press (LBP):** in addition to the VIPR®, all sizes have leak before press technology, which guarantees a visual indication if the fitting is not pressed.
- **Surface Protection:** Corrosion Resistant Zn-Ni Plating.
- **Grab Ring:** Deforms and Grips Outside Diameter of Pipe.
- **Applications:** Hydronic Heating, the Conveyance of Fluids, Gases, Oils, and Low-Pressure Steam.

CarbonPress® Operational Parameters:

Working pressure range from full vacuum to 250 psi (17.2 bar) for water, 125 psi (8.6 bar) for gas, and 200 psi (13.7 bar) for industrial applications.

CarbonPress® Certifications

IAPMO Z 1117 (EPDM and FKM). IAPMO/ANSI LC 4/CSA 6.32 (HNBR).

CarbonPress® Codes and Standards

IAPMO Z 1117, IAPMO/ANSI LC 4/CSA 6.32, ASME B31.1, B31.3, B31.9, CSA B149.1, UPC, and UMC.

XL Coupling with Stop

P x P

| Item Number | | | Nominal Size 1 | A (in) | L (in) |
|-------------|---------|---------|----------------|--------|--------|
| EPDM | HNBR | FKM | | | |
| MB90030 | MB90031 | MB90032 | 2½" | 1.18 | 4.92 |
| MB90035 | MB90036 | MB90037 | 3" | 1.42 | 5.98 |
| MB90040 | MB90041 | MB90042 | 4" | 1.63 | 7.87 |

