

Coupling w/o Stop

P x P



Job Name	<input type="text"/>
Job Location	<input type="text"/>
P.O.#	<input type="text"/>
Engineer	<input type="text"/>
Contractor	<input type="text"/>
Wholesaler	<input type="text"/>
Merit Associate	<input type="text"/>

- CarbonPress® Coupling w/o Stop P x P is available in sizes ½" – 2" with an EPDM, HNBR and FKM sealing element.
- **FIRST TO MARKET Visual Indicator Press Ring® (VIPR®):** facilitates immediate identification of un-pressed connections.
 - **Leak Before Press (LBP):** in addition to the VIPR®, all sizes have leak before press technology, which guarantees a visual indication if the fitting is not pressed.
 - **Surface Protection:** Corrosion Resistant Zn-Ni Plating.
 - **Grab Ring:** Deforms and Grips Outside Diameter of Pipe.
 - **Applications:** Hydronic Heating, the Conveyance of Fluids, Gases, Oils, and Low-Pressure Steam.

CarbonPress® Operational Parameters:
Working pressure range from full vacuum to 250 psi (17.2 bar) for water, 125 psi (8.6 bar) for gas, and 200 psi (13.7 bar) for industrial applications.


CarbonPress® Certifications
IAPMO Z 1117 (EPDM and FKM). IAPMO/ANSI LC 4/CSA 6.32 (HNBR).

CarbonPress® Codes and Standards
IAPMO Z 1117, IAPMO/ANSI LC 4/CSA 6.32, ASME B31.1, B31.3, B31.9, CSA B149.1, UPC, and UMC.

Coupling w/o Stop

P x P

Item Number			Nominal Size 1	L (in)
EPDM	HNBR	FKM		
MB90045	MB90046	MB90047	½"	2.83
MB90050	MB90051	MB90052	¾"	3.23
MB90055	MB90056	MB90057	1"	3.58
MB90060	MB90061	MB90062	1¼"	4.72
MB90065	MB90066	MB90067	1½"	4.88
MB90070	MB90071	MB90072	2"	5.12

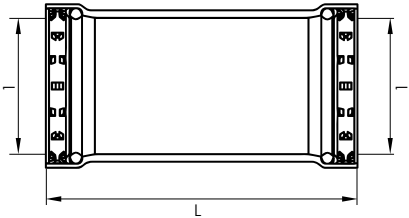

XL Coupling w/o Stop

P x P

Image
Coming Soon

Job Name

Job Location

P.O.#

Engineer

Contractor

Wholesaler

Merit Associate

CarbonPress® XL Coupling w/o Stop P x P is available in sizes 2½" – 4" with an EPDM, HNBR and FKM sealing element.

- **FIRST TO MARKET Visual Indicator Press Ring® (VIPR®):** facilitates immediate identification of un-pressed connections.
- **Leak Before Press (LBP):** in addition to the VIPR®, all sizes have leak before press technology, which guarantees a visual indication if the fitting is not pressed.
- **Surface Protection:** Corrosion Resistant Zn-Ni Plating.
- **Grab Ring:** Deforms and Grips Outside Diameter of Pipe.
- **Applications:** Hydronic Heating, the Conveyance of Fluids, Gases, Oils, and Low-Pressure Steam.

CarbonPress® Operational Parameters:

Working pressure range from full vacuum to 250 psi (17.2 bar) for water, 125 psi (8.6 bar) for gas, and 200 psi (13.7 bar) for industrial applications.

CarbonPress® Certifications

IAPMO Z 1117 (EPDM and FKM). IAPMO/ANSI LC 4/CSA 6.32 (HNBR).

CarbonPress® Codes and Standards

IAPMO Z 1117, IAPMO/ANSI LC 4/CSA 6.32, ASME B31.1, B31.3, B31.9, CSA B149.1, UPC, and UMC.

XL Coupling w/o Stop

P x P

Item Number			Nominal Size 1	L (in)
EPDM	HNBR	FKM		
MB90075	MB90076	MB90077	2½"	4.92
MB90080	MB90081	MB90082	3"	5.98
MB90085	MB90086	MB90087	4"	7.87

