

Carbon Coupling w/o Stop

P x P



Job Name

Job Location

P.O.#

Engineer

Contractor

Wholesaler

Merit Associate

MeritPress™ - Carbon Coupling w/o Stop P x P is available in sizes ½" – 2" with an EPDM, HNBR and FKM sealing element.

- **FIRST TO MARKET Visual Indicator Press Ring (VIPR)™:** facilitates immediate identification of un-pressed connections.
- **Leak Before Press (LBP):** in addition to the Visual Indicator Press Ring (VIPR)™, all sizes have leak before press technology, which guarantees a visual indication if the fitting is not pressed.
- **Surface Protection:** Corrosion Resistant Zn-Ni Plating.
- **Grab Ring:** Deforms and Grips Outside Diameter of Pipe.
- **Applications:** Hydronic Heating, the Conveyance of Fluids, Gases, Oils, and Low-Pressure Steam.

MeritPress™ - Carbon Press Operational Parameters

Working pressure range from full vacuum to 250 psi (17.2 bar) for water, 125 psi (8.6 bar) for gas, and 200 psi (13.7 bar) for industrial applications.


MeritPress™ - Carbon Press Certifications

IAPMO Z 1117 (EPDM and FKM), IAPMO/ANSI LC 4/CSA 6.32 (HNBR), and UL 213 and FM 1920 (EPDM & FKM).

MeritPress™ - Carbon Press Codes and Standards

IAPMO Z 1117, IAPMO/ANSI LC 4/CSA 6.32, ASME B31.1, B31.3, B31.9, CSA B149.1, UPC, and UMC.

Carbon Coupling w/o Stop			P x P	
Item Number			Nominal Size 1	L (in)
EPDM	HNBR	FKM		
MB90045	MB90046	MB90047	½"	2.83
MB90050	MB90051	MB90052	¾"	3.23
MB90055	MB90056	MB90057	1"	3.58
MB90060	MB90061	MB90062	1¼"	4.72
MB90065	MB90066	MB90067	1½"	4.88
MB90070	MB90071	MB90072	2"	5.12

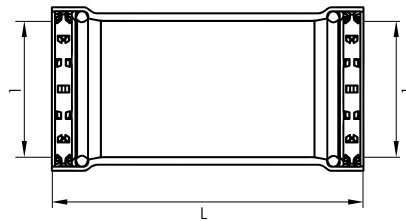

Carbon XL Coupling w/o Stop P x P

Image
Coming Soon

Job Name

Job Location

P.O.#

Engineer

Contractor

Wholesaler

Merit Associate

MeritPress™ - Carbon XL Coupling w/o Stop P x P is available in sizes 2½" – 4" with an EPDM, HNBR and FKM sealing element.

- **FIRST TO MARKET Visual Indicator Press Ring (VIPR)™:** facilitates immediate identification of un-pressed connections.
- **Leak Before Press (LBP):** in addition to the Visual Indicator Press Ring (VIPR)™, all sizes have leak before press technology, which guarantees a visual indication if the fitting is not pressed.
- **Surface Protection:** Corrosion Resistant Zn-Ni Plating.
- **Grab Ring:** Deforms and Grips Outside Diameter of Pipe.
- **Applications:** Hydronic Heating, the Conveyance of Fluids, Gases, Oils, and Low-Pressure Steam.

MeritPress™ - Carbon Press Operational Parameters

Working pressure range from full vacuum to 250 psi (17.2 bar) for water, 125 psi (8.6 bar) for gas, and 200 psi (13.7 bar) for industrial applications.

MeritPress™ - Carbon Press Certifications

IAPMO Z 1117 (EPDM and FKM), IAPMO/ANSI LC 4/CSA 6.32 (HNBR), and UL 213 and FM 1920 (EPDM & FKM).

MeritPress™ - Carbon Press Codes and Standards

IAPMO Z 1117, IAPMO/ANSI LC 4/CSA 6.32, ASME B31.1, B31.3, B31.9, CSA B149.1, UPC, and UMC.

Carbon XL Coupling w/o Stop P x P

Item Number			Nominal Size 1	L (in)
EPDM	HNBR	FKM		
MB90075	MB90076	MB90077	2½"	4.92
MB90076	MB90081	MB90082	3"	5.98
MB90085	MB90086	MB90087	4"	7.87

