

Equal Tee

P x P x P



Job Name

Job Location

P.O.#

Engineer

Contractor

Wholesaler

Merit Associate

CarbonPress® Equal Tee P x P x P is available in sizes ½" – 2" with an EPDM, HNBR or FKM sealing element.

- **FIRST TO MARKET Visual Indicator Press Ring® (VIPR®):** facilitates immediate identification of un-pressed connections.
- **Leak Before Press (LBP):** in addition to the VIPR®, all sizes have leak before press technology, which guarantees a visual indication if the fitting is not pressed.
- **Surface Protection:** Corrosion Resistant Zn-Ni Plating.
- **Grab Ring:** Deforms and Grips Outside Diameter of Pipe.
- **Applications:** Hydronic Heating, the Conveyance of Fluids, Gases, Oils, and Low-Pressure Steam.

CarbonPress® Operational Parameters:

Working pressure range from full vacuum to 250 psi (17.2 bar) for water, 125 psi (8.6 bar) for gas, and 200 psi (13.7 bar) for industrial applications.

CarbonPress® Certifications

IAPMO Z 1117 (EPDM and FKM). IAPMO/ANSI LC 4/CSA 6.32 (HNBR).


CarbonPress® Codes and Standards

IAPMO Z 1117, IAPMO/ANSI LC 4/CSA 6.32, ASME B31.1, B31.3, B31.9, CSA B149.1, UPC, and UMC.

Equal Tee

P x P x P

Item Number			Nominal Size 1	A (in)	A1 (in)	L (in)	L1 (in)
EPDM	HNBR	FKM					
MB90270	MB90271	MB90272	½"	0.89	0.89	1.91	1.91
MB90275	MB90276	MB90277	¾"	1.02	1.02	2.20	2.20
MB90280	MB90281	MB90282	1"	1.18	1.18	2.54	2.54
MB90285	MB90286	MB90287	1¼"	1.49	1.48	3.29	3.29
MB90290	MB90291	MB90292	1½"	1.61	1.61	3.46	3.46
MB90295	MB90296	MB90297	2"	1.93	1.93	3.86	3.86

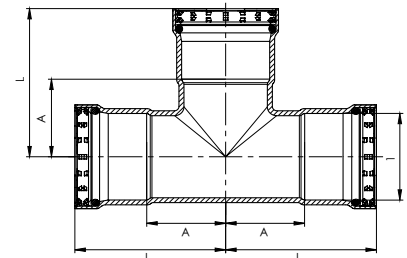

XL Equal Tee

P x P x P



Job Name

Job Location

P.O.#

Engineer

Contractor

Wholesaler

Merit Associate

CarbonPress® XL Equal Tee P x P x P is available in sizes 2½" – 4" with an EPDM, HNBR or FKM sealing element.

- **FIRST TO MARKET Visual Indicator Press Ring® (VIPR®):** facilitates immediate identification of un-pressed connections.
- **Leak Before Press (LBP):** in addition to the VIPR®, all sizes have leak before press technology, which guarantees a visual indication if the fitting is not pressed.
- **Surface Protection:** Corrosion Resistant Zn-Ni Plating.
- **Grab Ring:** Deforms and Grips Outside Diameter of Pipe.
- **Applications:** Hydronic Heating, the Conveyance of Fluids, Gases, Oils, and Low-Pressure Steam.

CarbonPress® Operational Parameters:
Working pressure range from full vacuum to 250 psi (17.2 bar) for water, 125 psi (8.6 bar) for gas, and 200 psi (13.7 bar) for industrial applications.

CarbonPress® Certifications
IAPMO Z 1117 (EPDM and FKM). IAPMO/ANSI LC 4/CSA 6.32 (HNBR).

CarbonPress® Codes and Standards
IAPMO Z 1117, IAPMO/ANSI LC 4/CSA 6.32, ASME B31.1, B31.3, B31.9, CSA B149.1, UPC, and UMC.

XL Equal Tee			P x P x P				
Item Number			Nominal Size 1	A (in)	A1 (in)	L (in)	L1 (in)
EPDM	HNBR	FKM					
MB90395	MB90396	MB90397	2½"	2.03	2.03	3.90	3.90
MB90420	MB90421	MB90422	3"	2.44	2.46	4.74	4.74
MB90445	MB90446	MB90447	4"	3.05	3.07	6.18	6.18

