

**Male Adapter**

**P x MPT**



**Job Name**

**Job Location**

**P.O.#**

**Engineer**

**Contractor**

**Wholesaler**

**Merit Associate**

**CarbonPress® Male Adapter P x MPT** is available in sizes ½" – 2" with an EPDM, HNBR or FKM sealing element.

- **FIRST TO MARKET Visual Indicator Press Ring® (VIPR®):** facilitates immediate identification of un-pressed connections.
- **Leak Before Press (LBP):** in addition to the VIPR®, all sizes have leak before press technology, which guarantees a visual indication if the fitting is not pressed.
- **Surface Protection:** Corrosion Resistant Zn-Ni Plating.
- **Grab Ring:** Deforms and Grips Outside Diameter of Pipe.
- **Applications:** Hydronic Heating, the Conveyance of Fluids, Gases, Oils, and Low-Pressure Steam.

**CarbonPress® Operational Parameters:**

Working pressure range from full vacuum to 250 psi (17.2 bar) for water, 125 psi (8.6 bar) for gas, and 200 psi (13.7 bar) for industrial applications.

**CarbonPress® Certifications**

IAPMO Z 1117 (EPDM and FKM). IAPMO/ANSI LC 4/CSA 6.32 (HNBR).


**CarbonPress® Codes and Standards**

IAPMO Z 1117, IAPMO/ANSI LC 4/CSA 6.32, ASME B31.1, B31.3, B31.9, CSA B149.1, UPC, and UMC.

**Male Adapter**

**P x MPT**

Item Number			Nominal Size		A1 (in)	L (in)
EPDM	HNBR	FKM	Size 1	Size 2		
MB90675	MB90676	MB90677	½"	½"	1.65	2.68
MB90680	MB90681	MB90682	¾"	¾"	1.69	2.87
MB90685	MB90686	MB90687	1"	1"	1.73	3.09
MB90690	MB90691	MB90692	1¼"	1¼"	2.06	3.86
MB90695	MB90696	MB90697	1½"	1½"	2.24	4.09
MB90700	MB90701	MB90702	2"	2"	2.40	4.33

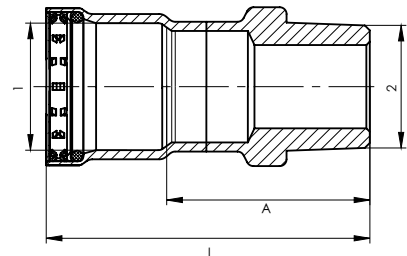

XL Male Adapter		P x MPT
	Job Name	<input type="text"/>
	Job Location	<input type="text"/>
	P.O.#	<input type="text"/>
	Engineer	<input type="text"/>
	Contractor	<input type="text"/>
	Wholesaler	<input type="text"/>
	Merit Associate	<input type="text"/>

CarbonPress® XL Male Adapter P x MPT is available in sizes 2½" – 4" with an EPDM, HNBR or FKM sealing element.

- **FIRST TO MARKET Visual Indicator Press Ring® (VIPR®):** facilitates immediate identification of un-pressed connections.
- **Leak Before Press (LBP):** in addition to the VIPR®, all sizes have leak before press technology, which guarantees a visual indication if the fitting is not pressed.
- **Surface Protection:** Corrosion Resistant Zn-Ni Plating.
- **Grab Ring:** Deforms and Grips Outside Diameter of Pipe.
- **Applications:** Hydronic Heating, the Conveyance of Fluids, Gases, Oils, and Low-Pressure Steam.

**CarbonPress® Operational Parameters:**  
Working pressure range from full vacuum to 250 psi (17.2 bar) for water, 125 psi (8.6 bar) for gas, and 200 psi (13.7 bar) for industrial applications.

**CarbonPress® Certifications**  
IAPMO Z 1117 (EPDM and FKM). IAPMO/ANSI LC 4/CSA 6.32 (HNBR).

**CarbonPress® Codes and Standards**  
IAPMO Z 1117, IAPMO/ANSI LC 4/CSA 6.32, ASME B31.1, B31.3, B31.9, CSA B149.1, UPC, and UMC.

XL Male Adapter					P x MPT	
Item Number			Nominal Size		A1 (in)	L (in)
EPDM	HNBR	FKM	Size 1	Size 2		
MB90705	MB90706	MB90707	2½"	2½"	2.66	4.53
MB90710	MB90711	MB90712	3"	3"	2.93	5.24
MB90715	MB90716	MB90717	4"	4"	3.13	6.26

