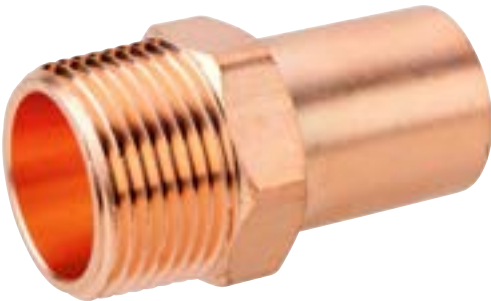


Male Street Adapter	FTG x MPT	
	<b>Job Name</b> <input type="text"/> <b>Job Location</b> <input type="text"/> <b>P.O.#</b> <input type="text"/> <b>Engineer</b> <input type="text"/> <b>Contractor</b> <input type="text"/> <b>Wholesaler</b> <input type="text"/> <b>Merit Associate</b> <input type="text"/>	
	<p><b>CopperPress® Small Diameter Male Street Adapter</b> is available in sizes ½" x ⅜" MPT – 2" x 2" MPT with an EPDM sealing element.</p> <ul style="list-style-type: none"> <li>• <b>FIRST TO MARKET Visual Indicator Press Ring® (VIPR®)</b> - facilitates immediate identification of un-pressed connections.</li> <li>• <b>Leak Before Press (LBP)</b> - in addition to the VIPR®, all sizes have leak before press technology, which guarantees a visual indication if the fitting is not pressed.</li> <li>• <b>Applications:</b> HVAC, plumbing, municipal, mechanical and industrial applications.</li> </ul>	

Male Street Adapter		FTG x MPT	
Item Number	D1 (in)	D2 (in)	L (in)
EPDM			
MB22900	½"	⅜" MPT	1.69
MB22910	½"	½" MPT	1.77
MB22920	½"	¾" MPT	1.93
MB22930	¾"	½" MPT	1.93
MB22940	¾"	¾" MPT	1.97
MB22950	1"	¾" MPT	1.97
MB22960	1"	1" MPT	2.13
MB22970	1¼"	1¼" MPT	2.48
MB22980	1½"	1½" MPT	2.87
MB22990	2"	2" MPT	3.19

**CopperPress® Operational Parameters:**  
EPDM working pressure range from full vacuum to 300 psi for water.

**CopperPress® Fitting Certifications**  
ICC-ES LC1002, NSF/ANSI/CAN 61, NSF/ANSI/CAN 372, IAPMO Z 1117.

**CopperPress® Codes and Standards**  
ASME B31.1, B31.3, B31.9, IPC, IMC, IRC, UPC, UMC, CPC & CMC, City of Los Angeles Plumbing and Mechanical Codes, Massachusetts Regulation 248 CMR 10.00: Uniform State Plumbing Code, Massachusetts State Building Code 780 CMR Ninth Edition: Chapter 28.

