


Pex (B) Adapter	P x PEX
	<div><div>Job Name</div><div>Job Location</div><div>P.O.#</div><div>Engineer</div><div>Contractor</div><div>Wholesaler</div><div>Merit Associate</div></div>
<p>CopperPress® Small Diameter Pex (B) Adapter is available in sizes ½" x ½" PEX – 1" x 1" PEX with an EPDM sealing element.</p> <ul style="list-style-type: none">• FIRST TO MARKET Visual Indicator Press Ring® (VIPR®) - facilitates immediate identification of un-pressed connections.• Leak Before Press (LBP) - in addition to the VIPR®, all sizes have leak before press technology, which guarantees a visual indication if the fitting is not pressed.• Applications: HVAC, plumbing, municipal, mechanical and industrial applications. <p>CopperPress® Operational Parameters: EPDM working pressure range from full vacuum to 300 psi for water.</p> <p>CopperPress® Fitting Certifications ICC-ES LC1002, NSF/ANSI/CAN 61, NSF/ANSI/CAN 372, IAPMO Z 1117.</p> <p>CopperPress® Codes and Standards ASME B31.1, B31.3, B31.9, IPC, IMC, IRC, UPC, UMC, CPC & CMC, City of Los Angeles Plumbing and Mechanical Codes, Massachusetts Regulation 248 CMR 10.00: Uniform State Plumbing Code, Massachusetts State Building Code 780 CMR Ninth Edition: Chapter 28.</p>	

Pex (B) Adapter		P x PEX		
Item Number	D1 (in)	D2 (in)	L (in)	A (in)
EPDM				
MB50000	½"	½" PEX	1.73	0.20
MB50030	½"	¾" PEX	1.59	0.16
MB50040	¾"	½" PEX	2.03	0.45
MB50010	¾"	¾" PEX	1.93	0.35
MB50020	1"	1" PEX	2.13	0.39

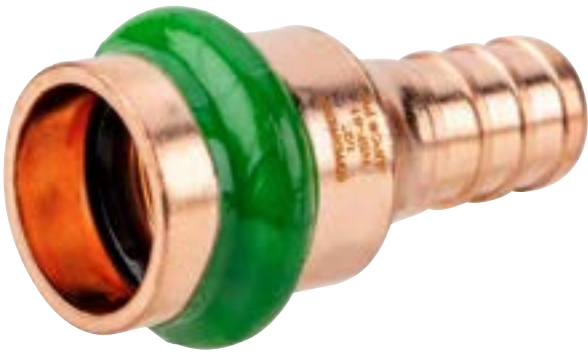