

Leaded Brass Ball Valves


Diameters: 1/4" - 2"

DESIGN FEATURES:

- **Body:** Forged Brass
- **Port:** Full
- **Design:** Two Piece Body
- **Handle:** Locking Device
- **Ball:** Chrome Plated Brass
- **Seats:** PTFE
- **Stem:** Blow-Out Proof
- **1/4" - 2" Rated:** 600PSI Non-Shock WOG
125PSI SWP

APPLICABLE STANDARDS:

- Threaded Ends ANSI B1.20.1
- Conforms to MSS-SP-110
- CSA Gas Approved to 2" (IPS Only)

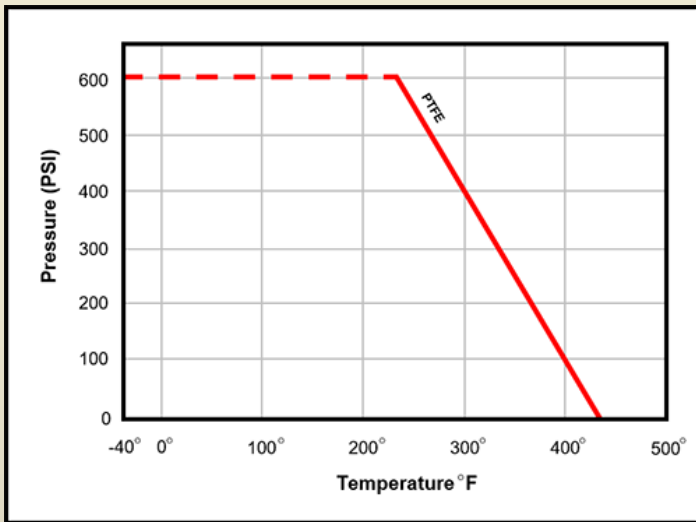

⚠ WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov. This product is not for use in potable water.

Cleveland Headquarters

One Merit Drive/PO Box 43127
Cleveland, OH 44143
TEL: 800.726.9800
FAX: 855.MBFAXIT (623.2948)
EMAIL: mbsales@meritbrass.com

Dallas Distribution Center

10614 King William Drive
Dallas, TX 75220
TEL: 877.259.2591
FAX: 877.259.2596
EMAIL: mbsalesTX@meritbrass.com

Birmingham Distribution Center

220 Oxmoor Court
Birmingham, AL 35209
TEL: 855.912.0409
FAX: 866.668.9168
EMAIL: mbsalesAL@meritbrass.com






Sparks Distribution Center

200 Vista Blvd., Suite #106
Sparks, NV 89434
TEL: 877.711.RENO (7366)
FAX: 877.376.0093
EMAIL: mbsalesNV@meritbrass.com


MERIT BRASS

DIRECTING THE FLOW OF *Quality*

www.meritbrass.com • www.MBWebXpress.com

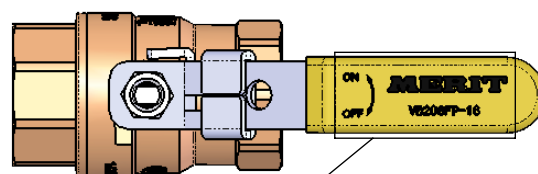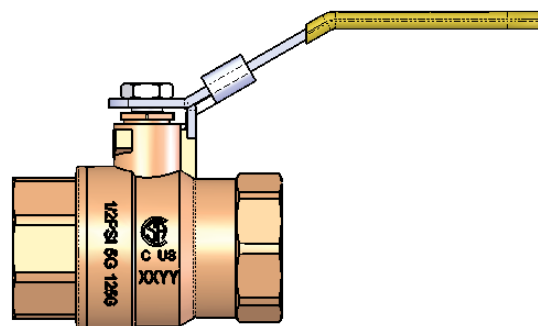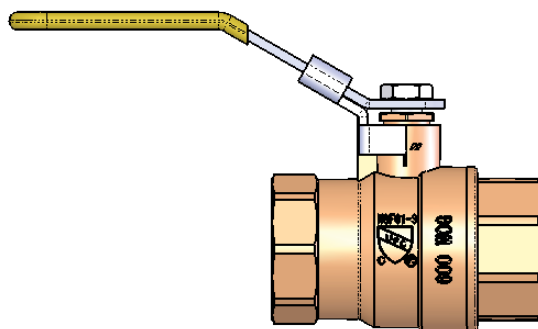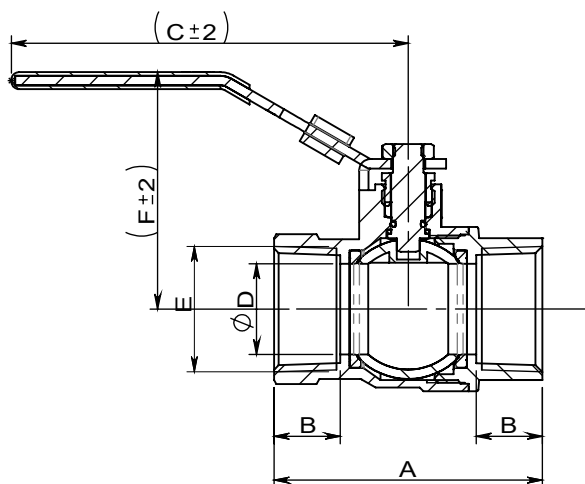

PART NO.

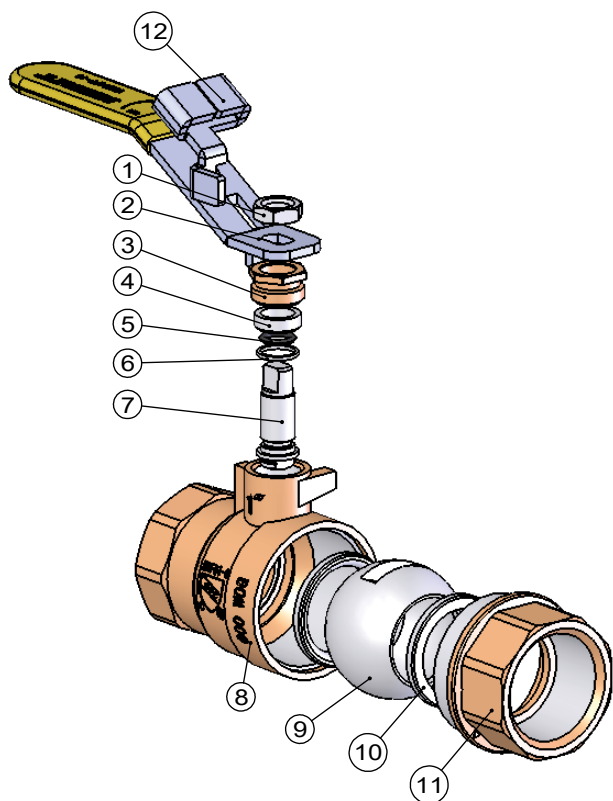

No.	Part	Material	QTY.
1	Hex-nut	Steel	1
2	Handle	Steel	1
3	Packing nut	Brass	1
4	Packing gland	PTFE	1
5	O-Ring	EPDM	1
6	Washer	PTFE	1
7	Stem	C36000	1
8	Body	C37700	1
9	Ball	Chrome Plated Brass	1
10	Seat	PTFE	2
11	Bonnet	C37700	1
12	Lock catch	Steel	1

Size	A(in)	B(in)	C(in)	D(in)	E	F(in)	Weight(lb)	PART NO.
1/4"	1.732	0.453	3.15	Ø 0.394	1/4-18NPT	1.843	0.26	VB206FP-04
3/8"	1.732	0.453	3.15	Ø 0.394	3/8-18NPT	1.843	0.26	VB206FP-06
1/2"	2.047	0.551	3.15	Ø 0.512	1/2-14NPT	1.937	0.37	VB206FP-08
3/4"	2.303	0.571	4.134	Ø 0.709	3/4-14NPT	2.291	0.55	VB206FP-12
1"	2.795	0.689	4.134	Ø 0.945	1-11.5NPT	2.469	0.88	VB206FP-16
1-1/4"	3.15	0.689	4.921	Ø 1.201	1 1/4-11.5NPT	3.039	1.36	VB206FP-20
1-1/2"	3.504	0.709	4.921	Ø 1.457	1 1/2-11.5NPT	3.217	1.88	VB206FP-24
2"	4.193	0.748	7.087	Ø 1.949	2-11.5NPT	3.72	3.44	VB206FP-32

Leaded Brass Ball Valves



Diameters: 2-1/2" - 4"

DESIGN FEATURES:

- **Body:** Forged Brass
- **Port:** Full
- **Design:** Two Piece Body
- **Handle:** Locking Device
- **Ball:** 304 Stainless Steel
- **Seats:** PTFE
- **Stem:** Blow-Out Proof
- **2-1/2" - 4" Rated:** 600PSI Non-Shock WOG
125PSI SWP

APPLICABLE STANDARDS:

- Threaded Ends ANSI B1.20.1
- Conforms to MSS-SP-110
- UL/FM Approved

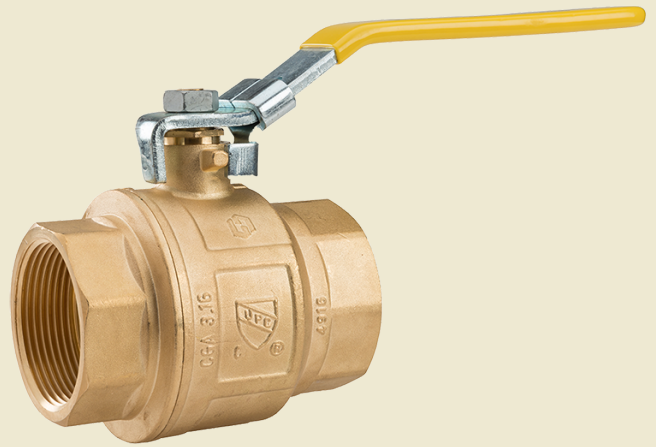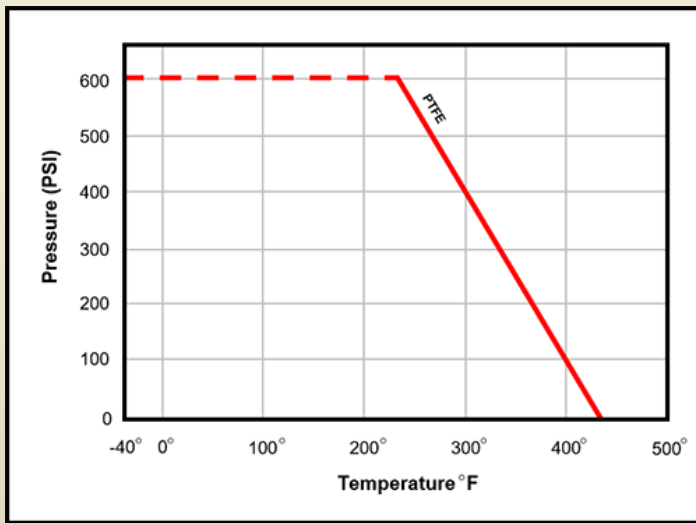

⚠ WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov. This product is not for use in potable water.

Cleveland Headquarters

One Merit Drive/PO Box 43127
Cleveland, OH 44143
TEL: 800.726.9800
FAX: 855.MBFAXIT (623.2948)
EMAIL: mbsales@meritbrass.com

Dallas Distribution Center

10614 King William Drive
Dallas, TX 75220
TEL: 877.259.2591
FAX: 877.259.2596
EMAIL: mbsalesTX@meritbrass.com

Birmingham Distribution Center

220 Oxmoor Court
Birmingham, AL 35209
TEL: 855.912.0409
FAX: 866.668.9168
EMAIL: mbsalesAL@meritbrass.com





Sparks Distribution Center

200 Vista Blvd., Suite #106
Sparks, NV 89434
TEL: 877.711.RENO (7366)
FAX: 877.376.0093
EMAIL: mbsalesNV@meritbrass.com

MERIT BRASS

DIRECTING THE FLOW OF *Quality*

www.meritbrass.com • www.MBWebXpress.com

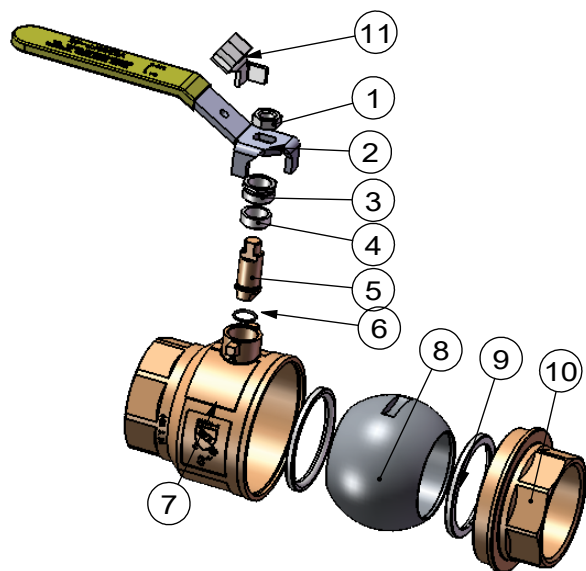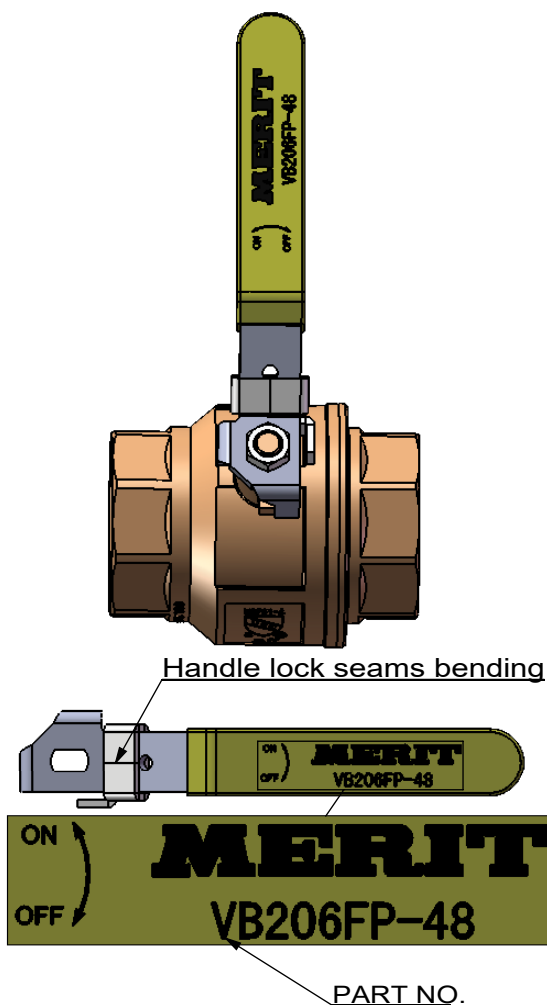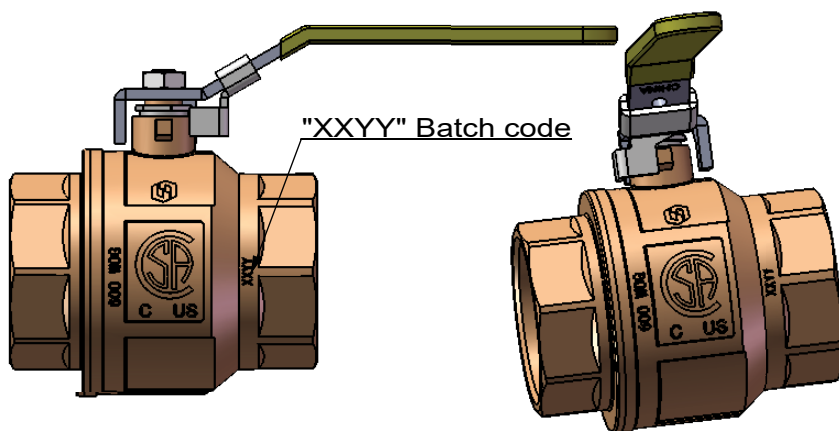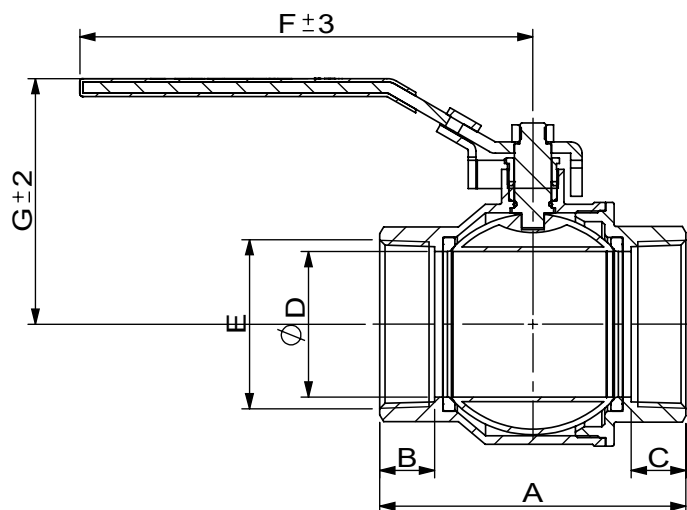

No.	Part	Material	Qty.
1	Hex-nut	Steel	1
2	Handle	Steel	1
3	Packing nut	Brass	1
4	Packing gland	PTFE	1
5	Stem	C3600	1
6	O-ring	EPDM	1
7	Body	C3770	1
8	Ball	Stainless Steel	1
9	Seat	PTFE	2
10	Bonnet	C3770	1
11	Lock catch	Steel	1

Size	A(in)	B(in)	C(in)	D(in)	E	F(in)	G(in)	Weight(lb)	PART NO.
2-1/2"	5.551	1.063	1.063	Ø 2.5	21/2-8NPT	9.449	4.744	7.32	VB206FP-40
3"	6.378	1.142	1.142	Ø 3.031	3-8NPT	9.449	5.118	10.11	VB206FP-48
4"	7.543	1.201	1.201	Ø 3.937	4-8NPT	9.449	5.866	16.91	VB206FP-64