

INNOVATIVE SOLUTIONS DRIVEN TO PROVIDE VALUE




MERIT'S COMPREHENSIVE PACKAGE

- **Size Range:** 1/4" – 4" NPT Threaded Ends
 - » 1/4" – 2": chrome plated brass ball.
 - » 2-1/2" – 4": stainless steel (304SS) Ball.
- Blow-out proof stem
- UL/FM approved & CSA gas approved to 2" (IPS Only)
- Conforms to MSS-SP-110

BRASS BALL VALVES

2-PC Brass Valves Leaded

Full port and designed to 300 psi Non-Shock WOG (125 psi SWP). The housing is Forged Brass (C37700) with PTFE seats. Sizes 0.25" – 2" have a Chrome Plated Brass Ball, and sizes 2.5" – 4" have a Stainless Steel (304 SS) ball. This product is suitable for above, or below ground, applications.

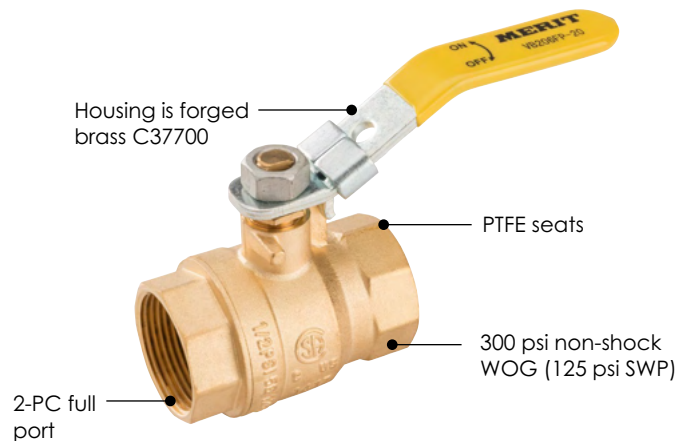

Learn more. www.meritbrass.com/valves

BRASS BALL VALVES FEATURES AND APPLICATIONS

Leaded

Design Features


- **Body:** forged brass
- **Port:** full
- **Design:** two piece body
- **Handle:** locking device
- **Ball:** chrome plated brass
- **Seats:** PTFE
- **Stem:** blow-out proof
- **1/4" – 2" rated:** 600PSI non-shock WOG 125PSI SWP
- **2-1/2" – 4" rated:** 600PSI non-shock WOG 125PSI SWP



Applicable Standards

- Threaded ends ANSI B1.20.1
- Conforms to MSS-SP-110
- CSA gas approved to 2" (IPS only)
- UL/FM approved



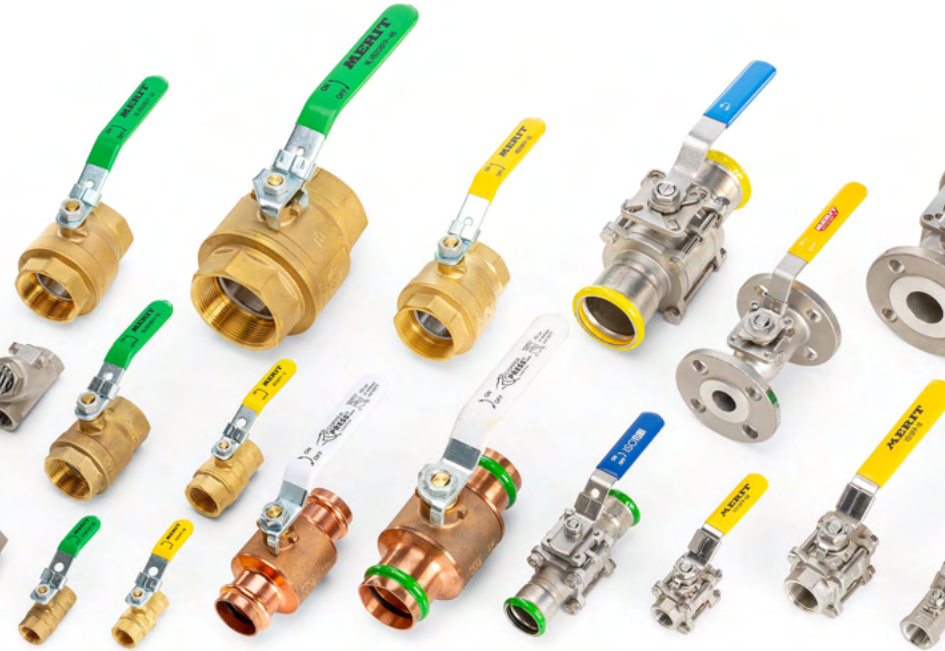


MERIT'S COMPREHENSIVE PACKAGE

- **Size Range:** 1/4" – 4" NPT Threaded Ends
 - » 1/4" – 2": chrome plated brass ball.
 - » 2-1/2" – 4": stainless steel (304SS) Ball.
- Blow-out proof stem
- UL/FM approved & CSA gas approved to 2" (IPS only)
- Conforms to MSS-SP-110
- NSF61 & ANSI 371 approved

BRASS BALL VALVES

2-PC Brass Valves Lead-free

Full port and designed to 300 psi Non-Shock WOG (125 psi SWP). The housing is Forged Brass (C346500) with PTFE seats. Sizes 0.25" – 1" have a Chrome Plated Brass Ball, and sizes 1.25" – 4" have a Stainless Steel (304 SS) ball. This product is suitable for above, or below ground, applications.

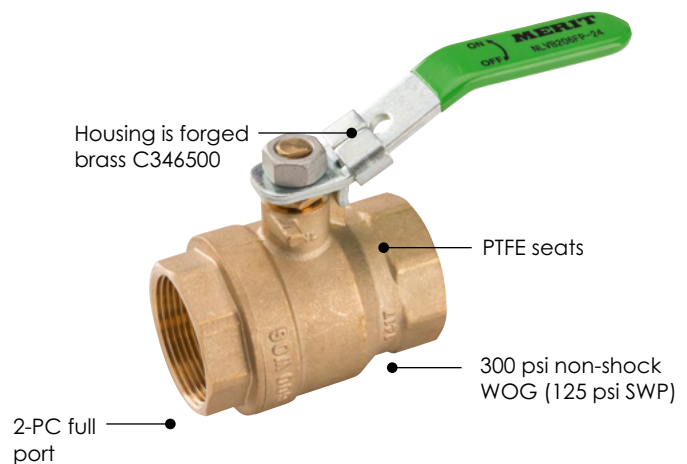


BRASS BALL VALVES FEATURES AND APPLICATIONS

Lead Free

Design Features

- **Body:** forged lead-free brass
- **Port:** full
- **Design:** two piece body
- **Handle:** locking device
- **Ball:** chrome plated lead-free brass
1/4" – 1" and 304 stainless steel 1-1/4" – 2"
- **Seats:** PTFE
- **Stem:** blow-out proof
- **1/4" – 2" rated:** 600PSI non-shock WOG
- **2-1/2" – 4" rated:** 600PSI non-shock WOG 125PSI SWP

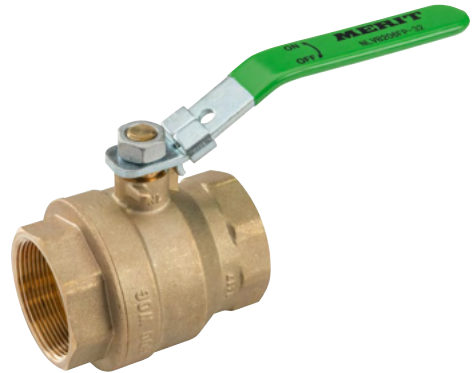

Applicable Standards

- Threaded ends ANSI B1.20.1
- Conforms to MSS-SP-110
- CSA gas approved to 2" (IPS only)
- UL/FM approved

If you have a specific application or need details on valve types, contact our sales team.

800.726.9800

Follow us on      

Merit Brass Headquarters Has An ISO 9001:2015 Registered Quality Management System

www.meritbrass.com

www.mbwebxpress.com

contactus@meritbrass.com