

Female Adapter	P x FPT
	<p>Job Name <input type="text"/></p> <p>Job Location <input type="text"/></p> <p>P.O.# <input type="text"/></p> <p>Engineer <input type="text"/></p> <p>Contractor <input type="text"/></p> <p>Wholesaler <input type="text"/></p> <p>Merit Associate <input type="text"/></p>

StainlessPress® Female Adapter P x FPT is available in sizes 1/2" – 2" with an EPDM, HNBR or FKM sealing element.

- **FIRST TO MARKET Visual Indicator Press Ring® (VIPR®)** - facilitates immediate identification of un-pressed connections.
- **Mates with IPS (Iron Pipe Size)** 304 & 316 Schedule 5 or 10 Stainless Steel Pipe.
- **Leak Before Press (LBP)** - in addition to the VIPR®, all sizes have leak before press technology, which guarantees a visual indication if the fitting is not pressed.
- **Applications:** HVAC, plumbing, municipal, mechanical, industrial and marine applications.

StainlessPress® Operational Parameters


- **Operating Pressure:** from full vacuum to 300 PSI on Schedule 5 or 10 Stainless Steel Pipe.
- **Temperature Range:** EPDM: -4°F to 230°F. | HNBR: -31°F to 248°F. | FKM: -4°F to 356°F.


StainlessPress® Certifications

IAPMO/ANSI/CAN Z1117, NSF/ANSI/CAN 61 (EPDM only), NSF/ANSI/CAN 372 (EPDM only), FM 1920, American Bureau of Shipping Product Design Assessment (PDA) Certificate 1-5-PR1438892-PDA, Piping System and Couplings.

StainlessPress® Codes and Standards

ASME B31.1, B31.3, B31.9, IPC, IMC, IRC, UPC, UMC, CPC & CMC, City of Los Angeles Plumbing & Mechanical Codes, Massachusetts Regulation 248 CMR 10.00: Uniform State Plumbing Code: Massachusetts State Building Code 780 CMR Ninth edition: Chapter 28: NPSC, NPCC.

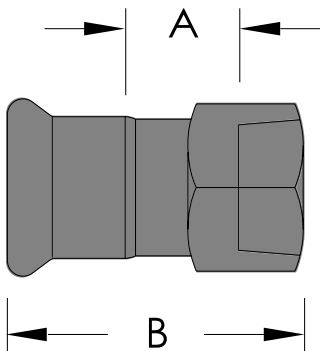



Female Adapter					P x FPT		
Item Number			Nominal Size (in)	O.D.	Dimensions (in)		Weight lbs
EPDM	HNBR	FKM			A	B	
MBF171/21/26GE	MBF171/21/26GEH	MBF171/21/26GEF	½"	0.840 x 0.840	0.74	2.17	0.20
MBF171/23/46GE	MBF171/23/46GEH	MBF171/23/46GEF	½" x ¾"	0.840 x 1.050	0.92	2.44	0.28
MBF171/216GE	MBF171/216GEH	MBF171/216GEF	½" x 1"	0.840 x 1.32	0.89	2.56	0.43
MBF173/41/26GE	MBF173/41/26GEH	MBF173/41/26GEF	¾" x ½"	1.050 x 0.840	0.84	2.47	0.32
MBF173/43/46GE	MBF173/43/46GEH	MBF173/43/46GEF	¾"	1.050 x 1.050	0.84	2.45	0.28
MBF173/416GE	MBF173/416GEH	MBF173/416GEF	¾" x 1"	1.050 x 1.32	0.80	2.59	0.43
MBF173/411/46GE	MBF173/411/46GEH	MBF173/411/46GEF	¾" x 1¼"	1.050 x 1.660	1.08	3.03	0.72
MBF1711/26GE	MBF1711/26GEH	MBF1711/26GEF	1" x ½"	1.32 x 0.840	0.86	2.56	0.50
MBF1713/46GE	MBF1713/46GEH	MBF1713/46GEF	1 x ¾"	1.32 x 1.050	0.86	2.56	0.43
MBF17116GE	MBF17116GEH	MBF17116GEF	1"	1.32 x 1.32	0.78	2.56	0.43
MBF17111/46GE	MBF17111/46GEH	MBF17111/46GEF	1" x ¼"	1.32 x 1.660	1.10	2.97	0.69
MBF17111/26GE	MBF17111/26GEH	MBF17111/26GEF	1" x ½"	1.32 x 1.900	1.05	3.13	0.80
MBF1711/41/26GE	MBF1711/41/26GEH	MBF1711/41/26GEF	1¼" x ½"	1.600 x 0.840	0.93	2.80	0.81
MBF1711/416GE	MBF1711/416GEH	MBF1711/416GEF	1¼" x 1"	1.660 x 1.32	0.86	2.80	0.63
MBF1711/411/46GE	MBF1711/411/46GEH	MBF1711/411/46GEF	1¼"	1.660 x 1.660	0.93	2.95	0.74
MBF1711/411/26GE	MBF1711/411/26GEH	MBF1711/411/26GEF	1¼" x ½"	1.660 x 1.900	0.88	3.11	0.69
MBF1711/216GE	MBF1711/216GEH	MBF1711/216GEF	1½" x 1"	1.900 x 1.32	1.01	3.06	1.26
MBF1711/211/46GE	MBF1711/211/46GEH	MBF1711/211/46GEF	1½" x ¼"	1.900 x 1.660	0.66	2.70	0.63
MBF1711/211/26GE	MBF1711/211/26GEH	MBF1711/211/26GEF	1½"	1.900 x 1.900	0.80	3.05	0.64
MBF1711/226GE	MBF1711/226GEH	MBF1711/226GEF	1½" x 2"	1.900 x 2.38	1.39	3.65	1.21
MBF17211/46GE	MBF17211/46GEH	MBF17211/46GEF	2" x ¼"	2.38 x 1.660	0.77	3.39	1.48
MBF17211/26GE	MBF17211/26GEH	MBF17211/26GEF	2" x ½"	2.38 x 1.900	1.29	3.90	1.83
MBF17226GE	MBF17226GEH	MBF17226GEF	2"	2.38 x 2.38	1.24	3.94	1.04