

Carbon 45° Elbow

P x P



Job Name

Job Location

P.O.#

Engineer

Contractor

Wholesaler

Merit Associate

MeritPress™ - Carbon 45° Elbow P x P is available in sizes ½" – 2" with an EPDM, HNBR or FKM sealing element.

- **FIRST TO MARKET Visual Indicator Press Ring (VIPR)™:** facilitates immediate identification of un-pressed connections.
- **Leak Before Press (LBP):** in addition to the Visual Indicator Press Ring (VIPR)™, all sizes have leak before press technology, which guarantees a visual indication if the fitting is not pressed.
- **Surface Protection:** Corrosion Resistant Zn-Ni Plating.
- **Grab Ring:** Deforms and Grips Outside Diameter of Pipe.
- **Applications:** Hydronic Heating, the Conveyance of Fluids, Gases, Oils, and Low-Pressure Steam.

MeritPress™ - Carbon Press Operational Parameters

Working pressure range from full vacuum to 250 psi (17.2 bar) for water, 125 psi (8.6 bar) for gas, and 200 psi (13.7 bar) for industrial applications.

MeritPress™ - Carbon Press Certifications

IAPMO Z 1117 (EPDM and FKM), IAPMO/ANSI LC 4/CSA 6.32 (HNBR), and UL 213 and FM 1920 (EPDM & FKM).


MeritPress™ - Carbon Press Codes and Standards

IAPMO Z 1117, IAPMO/ANSI LC 4/CSA 6.32, ASME B31.1, B31.3, B31.9, CSA B149.1, UPC, and UMC.

Carbon 45° Elbow

P x P

Item Number			Nominal Size 1	A (in)	L (in)
EPDM	HNBR	FKM			
MB90540	MB90541	MB90542	½"	0.87	1.89
MB90545	MB90546	MB90547	¾"	1.00	2.19
MB90550	MB90551	MB90552	1"	1.16	2.52
MB90555	MB90556	MB90557	1¼"	1.43	3.23
MB90560	MB90561	MB90562	1½"	1.54	3.41
MB90565	MB90566	MB90567	2"	1.87	3.80

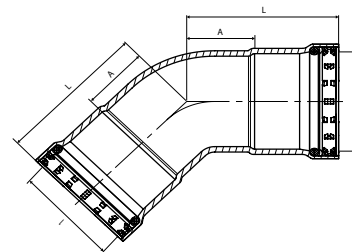

Carbon XL 45° Elbow

P x P



Job Name

Job Location

P.O.#

Engineer

Contractor

Wholesaler

Merit Associate

MeritPress™ - Carbon XL 45° Elbow P x P is available in sizes 2½" – 4" with an EPDM, HNBR or FKM sealing element.

- **FIRST TO MARKET Visual Indicator Press Ring (VIPR)™:** facilitates immediate identification of un-pressed connections.
- **Leak Before Press (LBP):** in addition to the Visual Indicator Press Ring (VIPR)™, all sizes have leak before press technology, which guarantees a visual indication if the fitting is not pressed.
- **Surface Protection:** Corrosion Resistant Zn-Ni Plating.
- **Grab Ring:** Deforms and Grips Outside Diameter of Pipe.
- **Applications:** Hydronic Heating, the Conveyance of Fluids, Gases, Oils, and Low-Pressure Steam.

MeritPress™ - Carbon Press Operational Parameters

Working pressure range from full vacuum to 250 psi (17.2 bar) for water, 125 psi (8.6 bar) for gas, and 200 psi (13.7 bar) for industrial applications.

MeritPress™ - Carbon Press Certifications

IAPMO Z 1117 (EPDM and FKM), IAPMO/ANSI LC 4/CSA 6.32 (HNBR), and UL 213 and FM 1920 (EPDM & FKM).

MeritPress™ - Carbon Press Codes and Standards

IAPMO Z 1117, IAPMO/ANSI LC 4/CSA 6.32, ASME B31.1, B31.3, B31.9, CSA B149.1, UPC, and UMC.

Carbon XL 45° Elbow

P x P

Item Number			Nominal Size 1	A (in)	L (in)
EPDM	HNBR	FKM			
MB90570	MB90571	MB90572	2½"	2.05	3.92
MB90575	MB90576	MB90577	3"	2.40	4.69
MB90580	MB90581	MB90582	4"	2.99	6.14

